


MAIN FLOOR JOIST 2X12 FRAMING NOTES:

- JOISTS ARE 2X12 SO, YEL LINE IS JOIST CENTER @ 16\"/>
- USE JOIST HANGERS IF BEARING IS LESS THAN 1 1/2\"/>
- NUMBERS NEXT TO JOISTS ARE ORDERING LENGTHS - VERIFY DIMENSIONS
- ATTACH RIM JOIST TO TOP PLATES AND ATTACH CONTINUOUS HEADER JOISTS (OVER WALLS) TO TOP PLATES WITH SIMPSON A35 FRAMING CLIPS @ 24\"/>
- C.C. NAILING PRACTICES APPLY
- DBL JOIST HANGERS ON DBL 2X10 BLOCING

IF TRUSS JOISTS ARE USED THE FOLLOWING APPLY: GUIDELINES AND REQUIREMENTS SHOWN IN LATEST EDITION OF TRUSS JOIST INSTALLATION GUIDE AND PRODUCT MANUALS. FOLLOW ALL MANUFACTURERS' REQUIREMENTS IN RELATION TO END B INTERMEDIATE BEARING, NAILING SIZE & SPACING, WEB STIFFENERS, RIM JOISTS FRAMING CONNECTIONS, ADHESIVES, HOLE SIZE & PLACEMENT OR OTHER RELATED ITEMS. TRUSS JOIST INSTALLATION PER CERAMIC TILE, STONE, GRANITE & OTHER FLOOR COVERING INSTALLATION GUIDELINES AND DETAILS. ON CENTER SPACING MAY HAVE TO BE DECREASED OR JOIST SIZE INCREASED FOR CERTAIN FLOOR COVERINGS.

ANY CHANGE, DEVIATION, ALTERATION, DISCREPANCY, CONTRADICTION OR OTHER VARIANCE TO THESE PLANS MUST BE SUBMITTED TO THE TRUSS JOIST STRUCTURAL ENGINEER AND DOME MANUFACTURER FOR APPROVAL OR CLARIFICATION PRIOR TO INSTALLATION OR COMPLETION OF THAT STRUCTURAL ITEM.

NATURAL SPACES DOMES OR PAUL DURAND, P.E./S.E., SHALL NOT BE HELD LIABLE FOR ANY CONSEQUENTIAL DAMAGES ARISING FROM ANY DEFICIENCIES IN THESE PLANS.

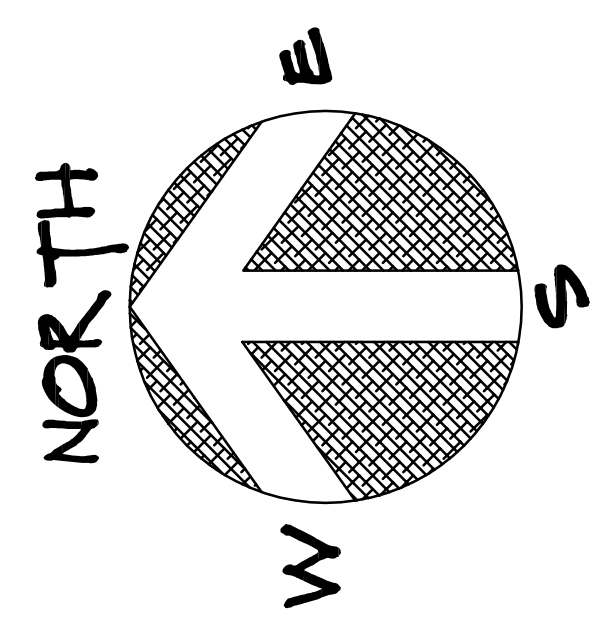

MODEL 2800 MID PROFILE
60 DIAMETER

MAIN FLOOR
JOIST LAYOUT
SCALE 1/4" = 1'-0"

JOY & KIRK BINGHAM
410 ARTIST AVE.
ENGLEWOOD, FL

DESIGN & INFORMATION © 2008 BY
NATURAL SPACES DOMES
97955 BRIDGE RD. NORTH BRANCH, MN 55056 651-674-4292 + 800-799-7107
WWW.NATURALSPACESDOMES.COM

BY	DATE	BY	DATE
NJH	11/18/07		
NJH	2/29/08		
BJC	4/23/08		

SHEET
9
11/18/07